

Self Lined Tube Skirt



Title: Self Lined Tube Skirt

Design: Katy Inch

Pattern : Katy Inch

Introduction: Do you have some jersey/knit fabric in your stash that you're not sure what to do with? This skirt is perfect for stash busting and can be done using your overlocker only! The pattern has 14 sizes and allows for 4 different types of stretch fabric. Use the **stretch ruler** to decide what stretch capacity your fabric has, then choose your size using the **measurement chart**. A great project for beginners, with the end result being a simple, stylish, and comfortable skirt. Start digging through that stash.... [Stretch ruler, Measurement chart & Skirt pattern can be found clicking this link](#)



YOU WILL NEED:

- >> Skirt pattern: **4 6 8 10 12 14 16 18 20 22 24 26 28 30**
- >> Rotary Cutter/Scissors
- >> Jersey/Knit fabric
- >> 2" Wide Elastic (if using)
- >> AND YOUR FABULOUS BABY LOCK MACHINE!



Print the stretch ruler PDF.

Cut a 4" square on the grain.

Fold test square in half.

Hold the fabric firmly on the left, stretch the fabric to the right as far as it will go.


The example shows that the fabric used is a minimal stretch fabric.



Place front and back pieces right sides together.



Pin at side seams, from waist to waist.

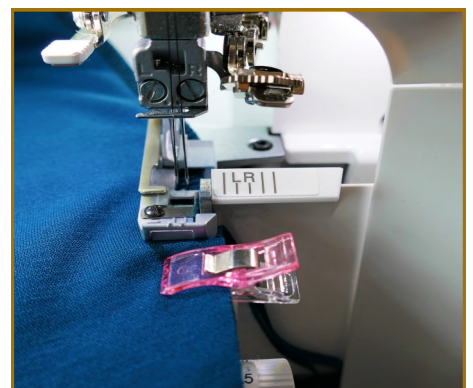

Using a 4 thread overlock, sew from waist to waist, on both side seams.



For more creative ideas visit:
www.babylockuk/campus






Fold the skirt in half.
Match the waist lines.



Pull one side of the outside of the skirt, this should pull the right side of the fabric to the outside.

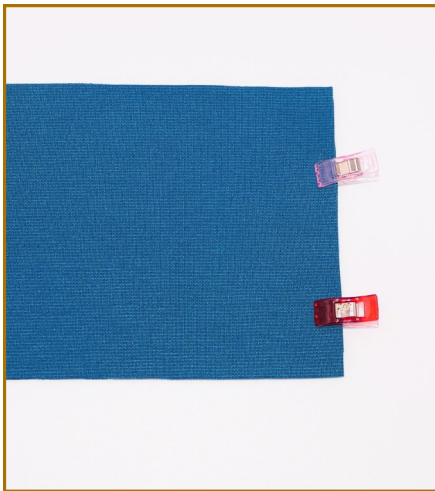

Fold the wrong sides of the waistband in half, matching the short lengths. Overlock together.



Fold in half, press if necessary.



Divide the waistband and the skirt waist into 1/4 measurements.






Match the 1/4 marks from the waistband to the skirt.




Overlock the waistband to the skirt, making sure to stretch the waistband between 1/4 measurements, this will allow an evenly applied band.

If adding elastic to the waistband, stop and leave a 2" gap, this will allow you to feed the elastic in to the band before enclosing completely in the band.

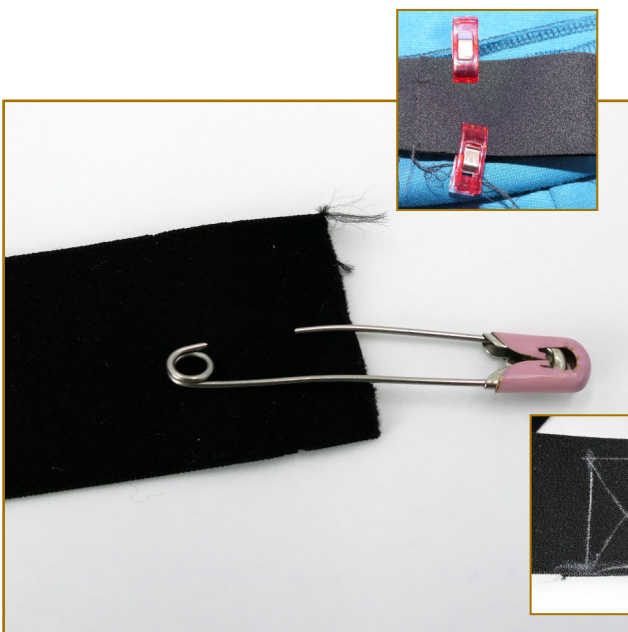

Using a large safety pin, pin the end of the elastic, and feed through the waistband channel.


Once through, make sure the elastic is sitting flat and overlapping by 1/2—1". Sew together, either using your sewing machine, or a hand stitch.





Finish overlocking the waistband to the skirt.

Press the seam towards the skirt.



So simple, so quick, and so ready to wear!

Your no fuss, no frills skirt is now ready to slip on.



Final Word

..... Design and Pattern by Katy Inch
for Baby Lock UK.

